


Porta-Jib Conversion

You should have received the following items


- | | |
|------------------------------|-------------------------------|
| 1. Remote Head | 12. Pan Block Mounting Screws |
| 2. Control Box/Battery Pack | 13. Pan Block |
| 3. Focus Motor | 14. Pan Block Pin |
| 4. Iris Motor | 15. Porta-Jib Bowl Mount |
| 5. Lens Bracket | 16. Bowl Mount Screws |
| 6. Zoom/Focus Control | 17. Remote Safety Screwknob |
| 7. Assistant Focus Control | 18. Bowl Mount Washer |
| 8. Pan/Tilt Joystick Control | 19. Porta-Jib Weight Bar. |
| 9. Control Cable | |
| 10. Battery Cable | |
| 11. Control Box Cable | |



1. Attach Bowl Mount to the Jib bowl mount using the mounting knob and screw you got with your jib. Make sure the washer is between the the knob and the mount

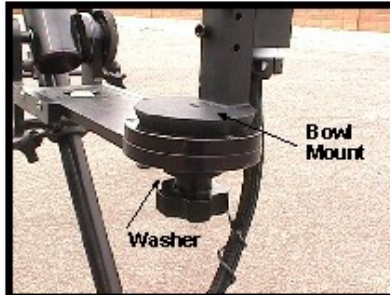

2. Remove the first Locating Screw. Make sure the second screw is tight and that the Remote Mounting Hole is aligned with the threaded hole that is behind it.

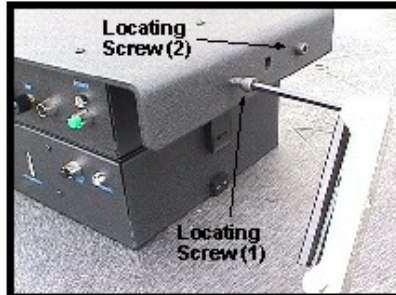

3. Remove the knob at the pivot point on your jib



4. Attach the Remote Unit with the Pivot Screw



5. Attach Remote Safety Screwknob as shown



6. Attach Weight Bar as shown



7. You can use a screwdriver to help hold one of the bars while you tighten the other



8. After the jib is weighted, attach the controls as shown



Refer the the Remote Triangle manual for the rest of the setup